


WS Ultra Fine Membrane System

- ❁ Certified by IAPMO according to NSF/ANSI 42
- ❁ Advanced hollow fiber technology helps reduce clogging
- ❁ Alkalinity and mineral enhancement
- ❁ Pore size: 0.01 microns
- ❁ Colloidal silver to help maintain waterway cleanliness
- ❁ Compatible with all Wellsys equipment
- ❁ Easy installation
- ❁ Can be used in combination with lead reduction filter to achieve lead reduction claim



WS Ultra Fine Membrane System

Multi-Stage Filtration Process

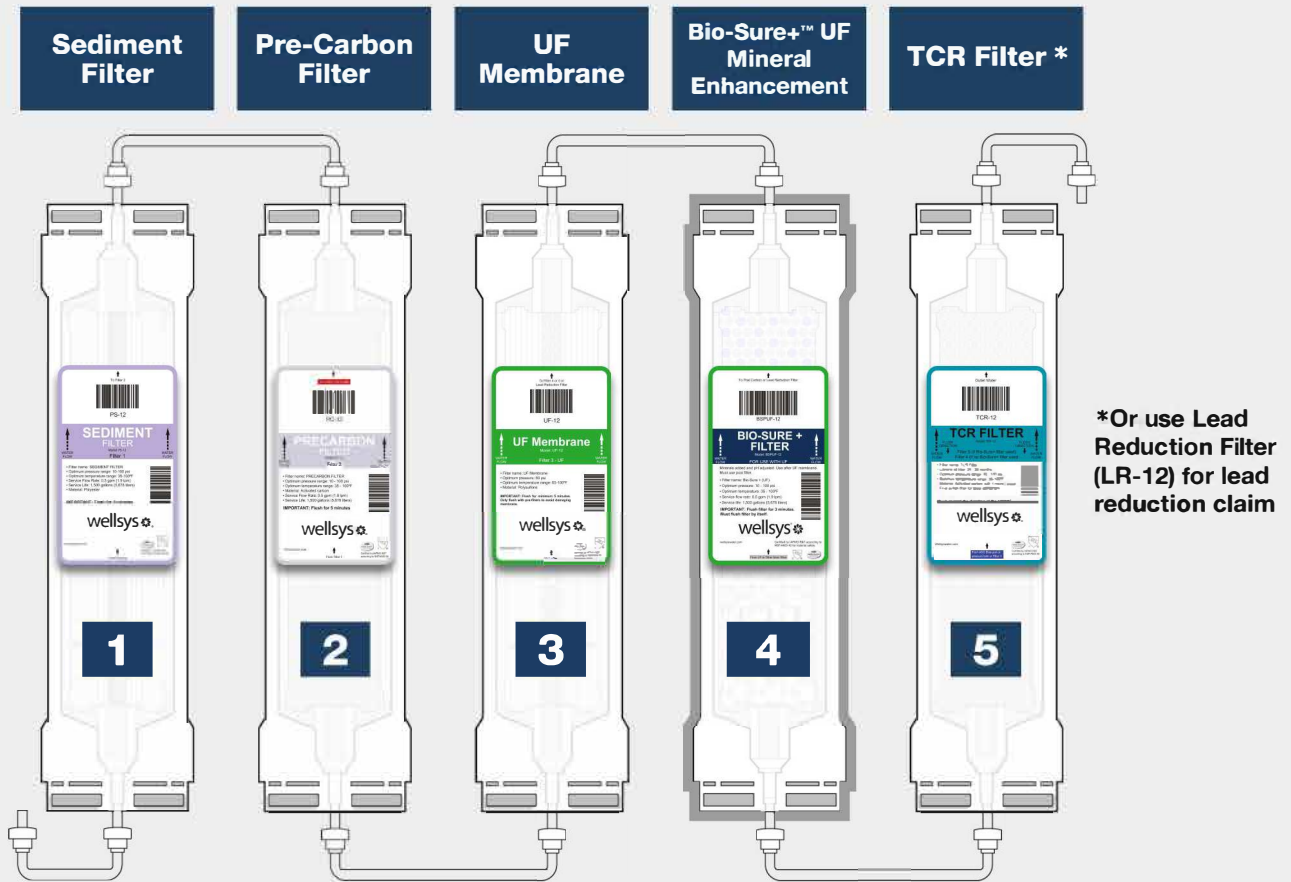

Description	Service life	Service flow rate	Optimum pressure	Dimensions
Sediment Filter	1,500 Gallons (5,678 L)	0.50 GPM (1.9 LPM)	10 - 100 PSIG (0.7 - 6.9 bar), non-shock	12.5" L x 2.5" D
Pre-Carbon Filter	1,500 Gallons (5,678 L)	0.50 GPM (1.9 LPM)	10 - 100 PSIG (0.7 - 6.9 bar), non-shock	12.5" L x 2.5" D
Ultra Fine (UF) Membrane	N/A	0.50 GPM (1.9 LPM)	10 - 100 PSIG (0.7 - 6.9 bar), non-shock	12.5" L x 2.5" D
Bio-Sure Plus Filter	1,500 Gallons (5,678 L)	0.50 GPM (1.9 LPM)	10 - 100 PSIG (0.7 - 6.9 bar), non-shock	12.5" L x 2.5" D
TCR Filter	1,500 Gallons (5,678 L)	0.60 GPM (1.9 LPM)	10 - 100 PSIG (0.7 - 6.9 bar), non-shock	12.5" L x 2.5" D



www.wellsyswater.com

630 Allendale Road, Suite 200
King of Prussia, PA 19406
855.558.9796

© 2020 Wellsys. All rights reserved



Certified by IAPMO R&T
according to NSF/ANSI 42
for material safety.