



## W9 WATER COOLER

- Touch-free sensor activation
- Innovative design and technology
- Single point of dispense for more modern look
- LED UV to help maintain the cleanliness of the system
- Stainless steel reservoirs
- Enhanced alkalinity\*
- New Proprietary filtration system has increased certifications and allows for easier filter changes with fewer fittings
- Nutrient boost from added minerals\*
- Improved, simpler leak-stop for lower operating costs
- Increased dispense rate ideal for filling larger bottles
- Large capacity drip tray

\* When used with Wellsys proprietary filtration

| DESCRIPTION                | SPECIFICATION            |
|----------------------------|--------------------------|
| Weight                     | 73 lbs (33 kgs)          |
| Dimensions                 | 50.3”h x 11.8”w x 15.5”d |
| Colors                     | Black                    |
| Cold Tank Capacity         | 2.1 gallons (7.9 liters) |
| Hot Tank Capacity          | 1.3 gallons (4.9 liters) |
| Dispense Height            | 12.25”                   |
| Recommended Water Pressure | 60-70 psi                |
| Rated Voltage/Frequency    | 110v/60Hz @ 4.9 amps     |
| Power Consumption          | 1.60 kWh/24 hours        |

Manufactured in Korea

## W9 CT WATER COOLER




Manufactured in Korea

- Touchless sensor operation
- Innovative design and technology
- Stainless steel reservoirs
- Internal 5-stage RO filtration
- Enhanced alkalinity\*
- State-of-the-art filtration\*
- Nutrient boost from added minerals\*
- Built-in leak stop
- Fits on most standard countertops

\* When used with Wellsys proprietary filtration

| DESCRIPTION                | SPECIFICATION            |
|----------------------------|--------------------------|
| Weight                     | 46.3 lbs (21 kg)         |
| Dimensions                 | 17.8”H x 11.7”W x 19.5”L |
| Cold Tank Capacity         | 1 gallon (3.8 liters)    |
| Hot Tank Capacity          | .5 gallons (1.9 liters)  |
| Dispense Height            | 10.7”                    |
| Recommended Water Pressure | 60-70 psi                |
| Rated Voltage/Frequency    | 110v/60Hz @ 4.9 amps     |
| Power Consumption          | 1.60 kWh/24 hours        |

# MULTI-STAGE PURIFICATION PROCESS

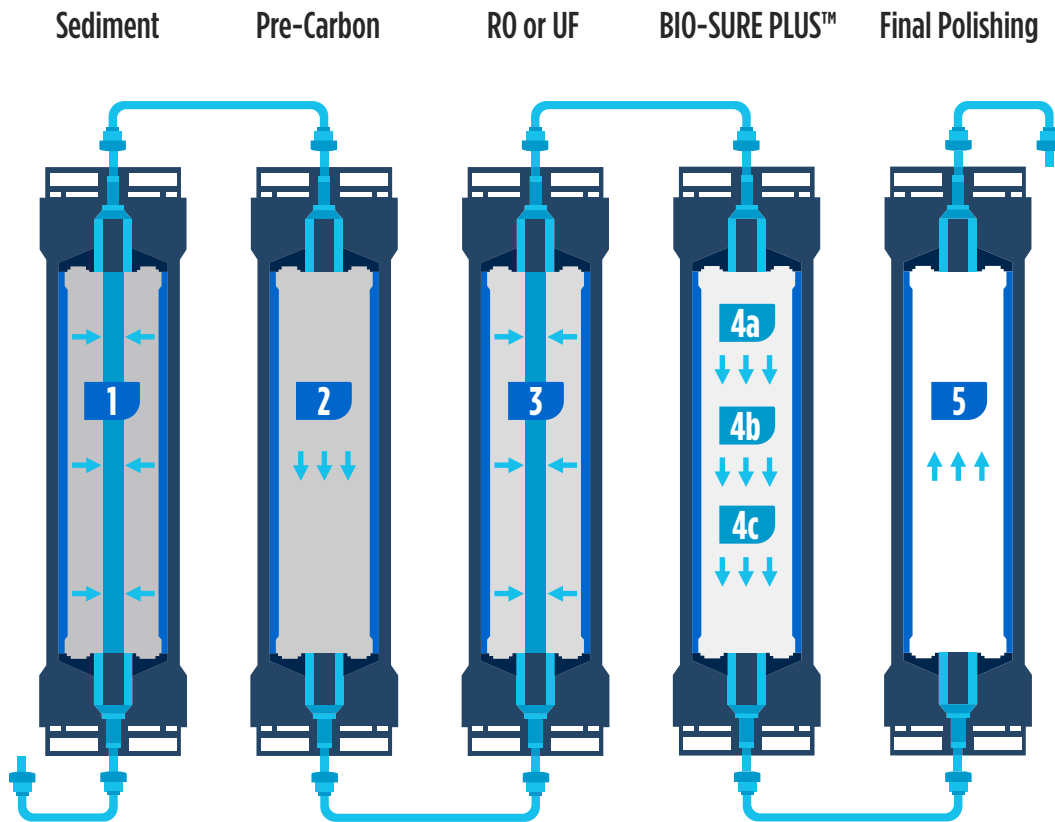

## 1. Sediment Filter

Reduces particles such as dirt, silt, rust and pipe residue.

## 2. Pre-Carbon Filter

Reduces chlorine, chemicals and pesticides.

## 3. Reverse Osmosis (RO) or Ultra Filtration (UF) Membrane

Reduces such contaminants as solids, arsenic, pharmaceuticals, and metals.

## 4. BIO-SURE PLUS™ FILTER

### 4a. Restores/Adds Minerals & Electrolytes

More than 20 minerals and electrolytes are added.

### 4b. Enhances Alkalinity

Water is enhanced with minerals to increase alkalinity.

### 4c. Cleans Water

Colloidal silver is used to maintain the cleanliness of the waterway.

## 5. Final Polishing Filter

Coconut shell carbon polishes the water for great taste.

wellsys 

630 Allendale Road, Suite 200  
King of Prussia, PA 19406  
855.558.9796  
[www.wellsyswater.com](http://www.wellsyswater.com)

**WATER FOR WELLNESS**

Certified by IAPMO in accordance with ANSI/NSF 372 for lead free products and certified by IAPMO R&T in accordance with UL 399 and CSA 22.2 for electrical safety.

