


WS Ultra Fine Membrane System

- ❁ Certified by IAPMO according to NSF/ANSI 42
- ❁ Advanced hollow fiber technology helps reduce clogging
- ❁ Alkalinity and mineral enhancement
- ❁ Pore size: 0.015 microns
- ❁ Colloidal silver to help maintain waterway cleanliness
- ❁ Compatible with all Wellsys equipment
- ❁ Easy installation
- ❁ Can be used in combination with lead reduction filter to achieve lead reduction claim



WS Ultra Fine Membrane System

Multi-Stage Filtration Process

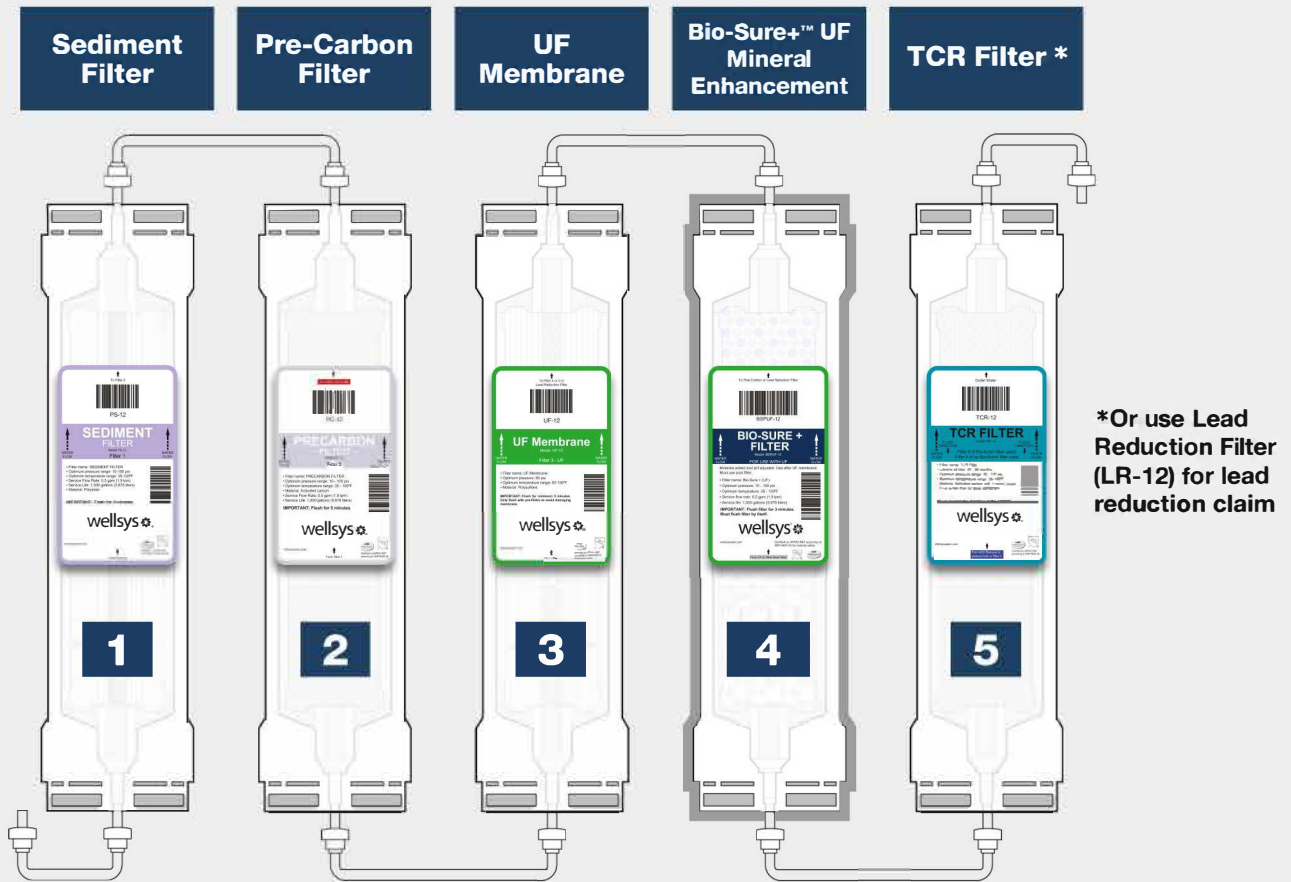

| Description | Service life | Service flow rate | Optimum pressure | Dimensions |
|---------------------------------|----------------------------|-----------------------|---|------------------|
| Sediment Filter | 1,500 Gallons (5,678 L) | 0.50 GPM (1.9 LPM) | 10 - 100 PSIG (0.7 - 6.9 bar), non-shock | 12.5" L x 2.5" D |
| Pre-Carbon Filter | 1,500 Gallons (5,678 L) | 0.50 GPM (1.9 LPM) | 10 - 100 PSIG (0.7 - 6.9 bar), non-shock | 12.5" L x 2.5" D |
| Ultra Fine (UF) Membrane | N/A | 0.50 GPM (1.9 LPM) | 10 - 100 PSIG (0.7 - 6.9 bar), non-shock | 12.5" L x 2.5" D |
| Bio-Sure Plus Filter | 1,500 Gallons (5,678 L) | 0.50 GPM (1.9 LPM) | 10 - 100 PSIG (0.7 - 6.9 bar), non-shock | 12.5" L x 2.5" D |
| TCR Filter | 1,500 Gallons (5,678 L) | 0.60 GPM (1.9 LPM) | 10 - 100 PSIG (0.7 - 6.9 bar), non-shock | 12.5" L x 2.5" D |



www.wellsyswater.com

630 Allendale Road, Suite 200
King of Prussia, PA 19406
855.558.9796

© 2020 Wellsys. All rights reserved



Certified by IAPMO R&T
according to NSF/ANSI 42
for material safety.